



PROXY KIT

PROXY-RP01

The Audacity® Proxy Kit is an “always-on” cloud communications device that enables one or more Audacity Wireless Controls Gateways to securely connect to the cloud, providing 24/7 access to remotely configure, control, and monitor your lighting environment as well as monitor environmental sensors. This remote access can be accomplished through our web interface at audacitycontrols.com, or through our mobile app, available for both Apple iOS and Android.

HOW IT WORKS

The Audacity Proxy Kit provides a convenient way to enable cloud connectivity for those installations without a dedicated IT department capable of running the proxy on a server machine.

INSTALLATION IS EASY

As with the other components of the Audacity Wireless Controls system, the Proxy Kit eases installation as it requires no complicated network configuration. The Kit supports dynamic network addressing using standard DHCP and to setup WiFi (if desired) is a simple drag and drop of the client’s network name (SSID) and password. Once connectivity to the cloud has been verified, the proxy is essentially maintenance-free.

The Audacity Wireless Controls system can be used to provide compliance with ASHRAE 90.1-2016 and CA Title 24 requirements.

**AUDACITY BY IDEAL®:
CUTTING COSTS.
CUTTING EDGE.**

IDEAL has been a leading manufacturer of quality electrical products for over one hundred years. Crafted at the intersection of simple and innovative, our new Audacity Wireless Controls system.

AUDACITY®
WIRELESS LIGHTING CONTROL
YOUR WORLD IN A BETTER LIGHT

PROXY KIT

PROXY-RP01




On the DesignLights Consortium™ Qualified Products List

SPECIFICATIONS

ITEM	DESCRIPTION
Regulatory Approvals	FCC ID: 2ABCB-RPI3BP IC: 20953-RPI3P
Input Voltage	120/240V AC with Power Supply; 5V DC without Power Supply
Input Power	5V/2.5A DC via micro USB connector
Configuration/Network Port	Ethernet (WiFi Optional)
Processor	Broadcom BCM2837B0, Cortex-A53 64-bit SoC @ 1.4GHz
Connectivity	2.4 Ghz and 5 GHz IEEE 802.11.b/g/n/ac wireless LAN, Gigabit Ethernet over USB 2.0 (maximum throughput 300 Mbps), 4 x USB 2.0 ports
SD Card Support	Micro SD format for loading operating system and data storage
Operating Temperature	32°F to 122°F (0°C to 50°C)
Installation Environment	Indoor use only
Enclosure	Plastic
Color	Black
Dimensions	3.7" x 2.8" x 1.0" (9.4 cm x 7.2 cm x 2.5 cm)
Weight	.80 lb (12.8 oz)
Warranty	5 year

Catalog Number	59-PROXY-RP01
Description	Audacity Proxy Kit

MECHANICAL DIMENSIONS (INCHES/CM)

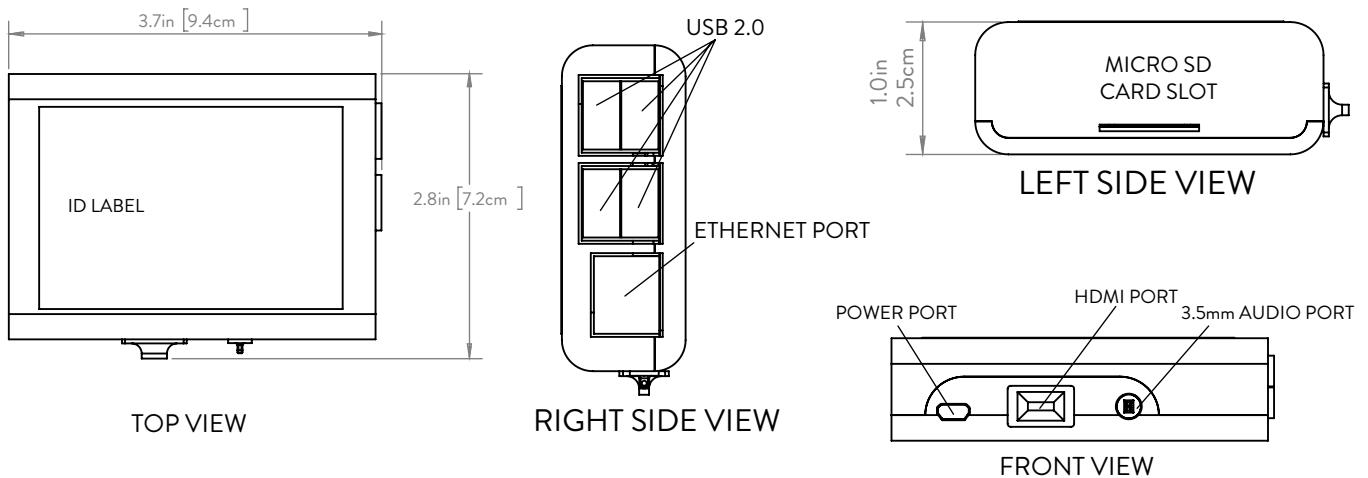

CONTACT US TODAY FOR A CONSULTATION

1.800.273.9989

CONTACTUS@AUDACYWIRELESS.COM

AUDACYWIRELESS.COM

AUDACY®

WIRELESS LIGHTING CONTROL

YOUR WORLD IN A BETTER LIGHT

A DIVISION OF IDEAL INDUSTRIES, INC.